


High Volume Fuel Carriage in 24 ft—Carbon Steel Tanks



Standard Features

<u>Nom. Capacity</u>	<u>Tare</u>	<u>MGW</u>
32,000 ltr	4800 kg	39000 kg
Working Pressure:	4 bar (58 psi)	0.41 bar allowable vacuum
Test Pressure:	6 Bar (87 psi)	<i>(NB: 2.65 bar tanks also avail.)</i>
ISO Dimensions:	(24' x 8' x 8' 6")	
Structural Materials:	EN 10210, EN10025, A516	
Insulation System:	None	
Approvals:	UN coded T7, RID/ADR, USDOT, AAR 600, UIC, TIR	
Carry:	UN 1202 / 1203	

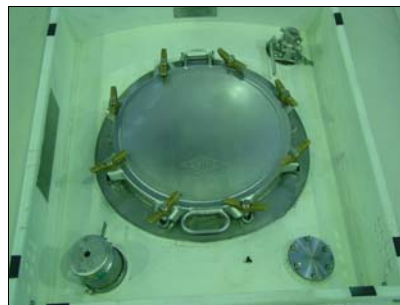

Tectainer Products Inc:

Bulk Containers

20ft and 40ft Full Opening Side Door Containers

Waste-management Containers

Open-top, GPs & Flatracks

LPG T50 tanks

27 tonne Bitumen tanks

28,000 ltr Lubricant & Oil Tanks

70 m3 Petrochem storage Tanks

26,000 ltr tank containers

28,000 ltr Food tanks