

Aviation Site Storage Tanks (Bunded)

www.tectainer.co.uk



Ratings

Nom. Capacity *

60,000 ltr
28,000 ltr
10,000 ltr

Tare (nom)

12,000 kg
9,000 kg
4,000 kg


Dimensions

40ft x 8ft x 9ft 6"
20ft x 8ft x 8ft 6"
10ft x 8ft x 8ft 6"

* Ratings are for non recessed ends

UNIQUE DESIGN FEATURES


- Patented Inner Tank
- Cost effective containerisation
- Quick set-up
- Process connection flexibility
- Level Gauging
- Environmental (Bunded)



Patented Innertank optimizes the internal volume.



Create Site Storage Tankage

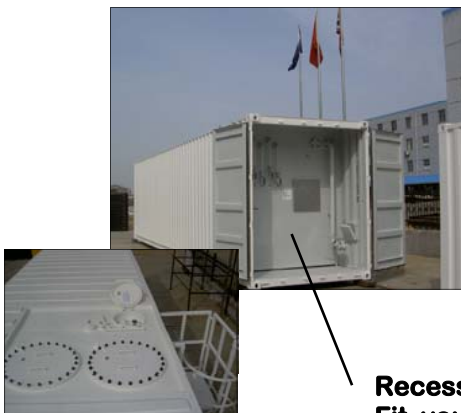

Recessed end option.
Fit your equipment here behind secure lockable doors.

Standard Equipment

Manways:
Venting:
Discharge Valve:
Dispenser Valve:

Overfill Protection:
Height Access:

(Valves and Pipes are SS - 5 Bar)

600mm Diameter
4" Vent stack/ flame arrestors
High level to low - fill connection.
High level to low - for connection to pump or dispenser
Overfill valve
Ladder or walkway options—hand rail at height

Tectainer Products Inc:

Bulk Containers

20ft and 40ft Full Opening Side Door Containers

Waste-management Containers

Open-top, GPs & Flatracks

LPG T50 tanks

27 tonne Bitumen tanks

28,000 ltr Lubricant & Oil Tanks

70 m3 Petrochem storage Tanks

26,000 ltr tank containers

28,000 ltr Food tanks