




FEATURES

- 10,000 — 12,000 litre Reservoir Capacity .
- Melt Rate of up to 1400—1600 litre per/hour
- Based on Penetration Grade Bitumen
- Container ISO Dimensions 20' x 8' x 8' 6"
- Transport by Road, Rail or Sea.
- Diesel Heating System (requires 230 Vac—1 phase 1 kw)
- Optional Decanting Pump (requires 230 Vac—1 phase 3 kw)
- Mobile from Site to Site
- Holds 6 x 210 litre drums in its insulated ovens at one time
- Various Range of Drum sizes can be handled upon request
- Product Recirculated connections included.
- Removable Tarpaulin Cover.
- Requires site assembly of included drum loading system

** Decanting / Melt Rates based on ambient operation at min. 10deg C and assumes un-damaged drums (Note: Damaged Drums can reduce decanter through pt considerably)

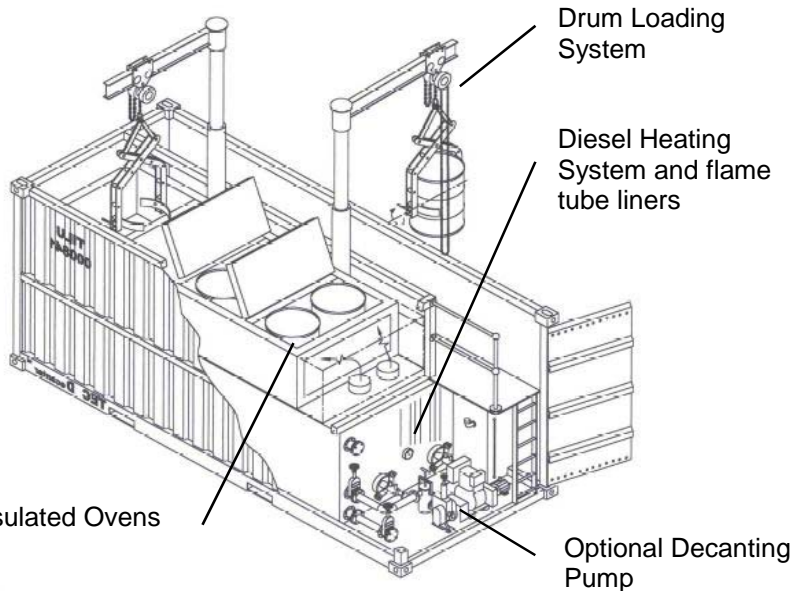

Tectainer Products Inc:

Bulk Containers

20ft and 40ft Full Opening Side Door Containers

Waste-management Containers

Open-top, GPs & Flatracks

LPG T50 tanks

27 tonne Bitumen tanks

28,000 ltr Lubricant & Oil Tanks

Up to 70 m3 Petrochem storage Tanks

26,000 ltr tank containers

28,000 ltr Food tanks

Bitutainers

Lubetainers

Multitainers

