

26 ,000 Ltr Diesel/Petrol Tanks

www.tectainer.co.uk



Specification

Nom. Capacity	Tare	MGW
26,000 ltr (5812 USgal)	<5000 kg	34,000 kg
Working Pressure:	2.65 Bar	
Test Pressure:	4 Bar	
ISO Dimensions:	L6058mm x W2048mm x H2591mm (20' x 8' x 8' 6")	
Structural Materials:	MNR 16N	
Approvals:	UN coded, RID/ADR, USDOT, AAR 600, UIC, TIR, TC	
Fuels:	UN1202, UN1203	

Tectainer Products Inc:

Bulk Containers

20ft and 40ft Full Opening Side Door Containers

Waste-management Containers

Open-top, GPs & Flatracks

LPG T50 tanks


27 tonne Bitumen tanks

28,000 ltr Lubricant & Oil Tanks

70 m3 Petrochem storage Tanks

26,000 ltr tank containers

28,000 ltr Food tanks

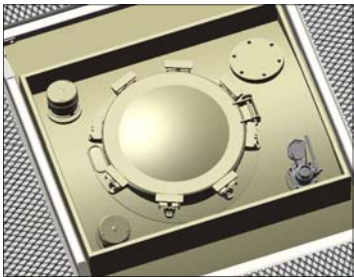

Manway Area

Standard Equipment (Fortvale or Equal)

Manway:	500mm Dia.
Pressure Device:	2 off—2 1/2" Prevac
Discharge Valve:	Fortvale Freeflow
Air Valve	1 1/2" Air Valve
High Access:	Ladder, Walkway and Hand rail
Document	Document Holder



Discharge Area

Optional Equipment

- Calibrated Dipstick in Manway Area & Calibration plate
- Overfill Valve
- Insulation as Required

HEAD OFFICE

Armech International Limited
Haywards Heath, W. Sussex UK
Ph: +44 (0)1444 230 865
Fax: +44 (0)1444 230 885

JV FACTORY

Armech (Mechanical) Ltd
Jiangsu Province
PR China

WORLDWIDE OFFICES:

- TEC-Armech (Mechanical) Ltd, Shanghai, China
- Armech Mechanical Ltd, Auckland, New Zealand
- Armech Europe SARL, Annecy, France
- Container Options Pty, Sydney, Australia

